



UFL PRECISION SHUNT

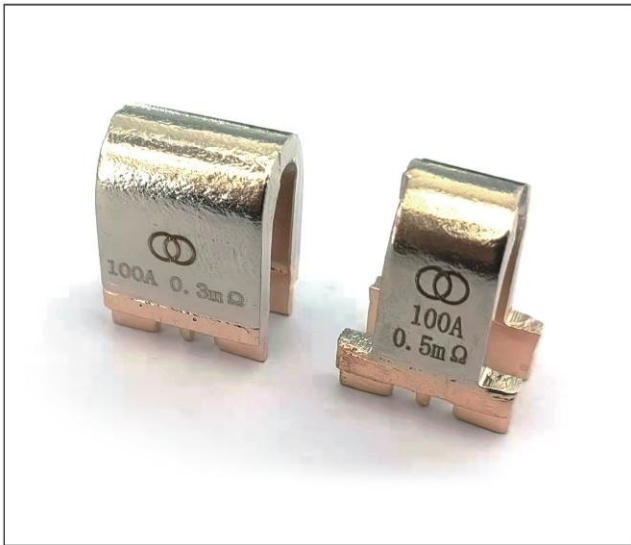

Construction(mm)

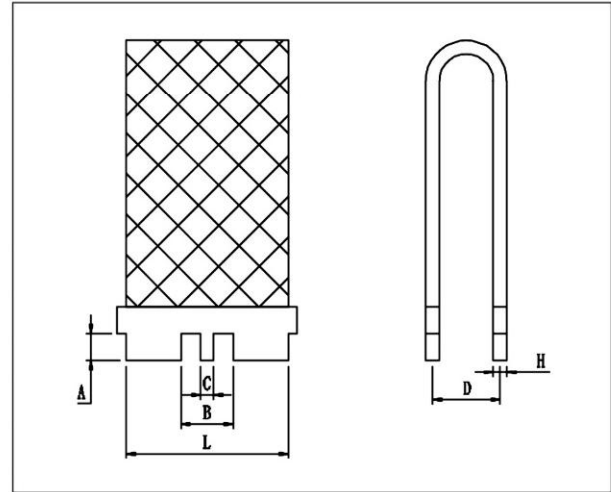

Product features:

- Kelvin connection
- Excellent Longterm Stability
- Electron beam welding process

Application:

- Power supply module
- Switching Mode Power Supply
- Frequency converter
- Current sampling system

Dimensions(mm)

Type	L	A	B	C	D	H
UFL 100A-0.3mΩ	18	3.5	6.5	1.5	8.5	1.5
UFL 100A-0.5mΩ	18	3.5	6.5	1.5	8.5	1.5
UFL 60A-0.3mΩ	18	3.5	6.5	1.4	8.5	1.5
UFL 80A-80mV	18	3.5	5.8	1.4	7.7	1.5
UFL 80A-0.4mΩ	15	3	5.8	1.4	6.5	1.5

Specification:

Type	Resistance VaValues	Tolerance	Rated Current
UFL 100A-0.3mΩ	0.3mΩ	± 0.5% ± 1.0%	100A
UFL 100A-0.5mΩ	0.5mΩ	± 0.5% ± 1.0%	100A
UFL 60A-0.3mΩ	0.3mΩ	± 0.5% ± 1.0%	60A
UFL 80A-80mV	1.0mΩ	± 0.5% ± 1.0%	80A
UFL 80A-0.4mΩ	0.4mΩ	± 0.5% ± 1.0%	80A